



Rose Series UFO




60 °



120 °



120 ° Frosted

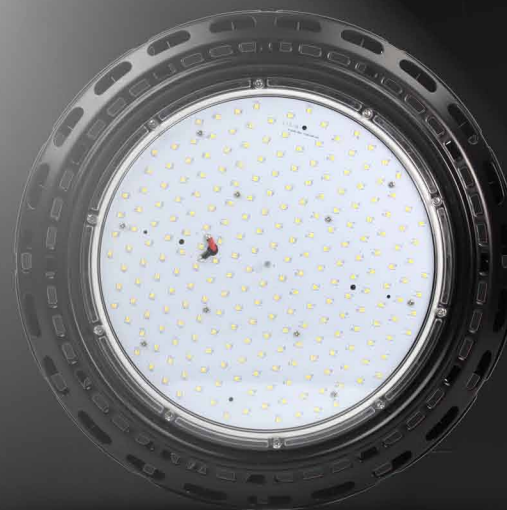

PHILIPS
LUMILEDS

 **NICHIA**

OSRAM
Opto Semiconductors

LUX LIGHTING





IP 65
5 years 
guarantee

90-305V
AC 
47-63HZ

>0.95
PF

<15%
THD

2700-
7000K
CCT

70-90
CRI

LM80
IES LED


indoor

IK10
shockproof


CLASS I


OFF ON
dimmable

CE
EURO

FC
EURO

RoHS
EURO



50000h
warranty



LUX LIGHTING



DIFFERENT INSTALLATION WAYS TO CHOOSE



● Ring hook
Default Convention




● Trestle
Special customization



● Cliver, Hanger
Special customization



● Cliver, Hanger
Special customization

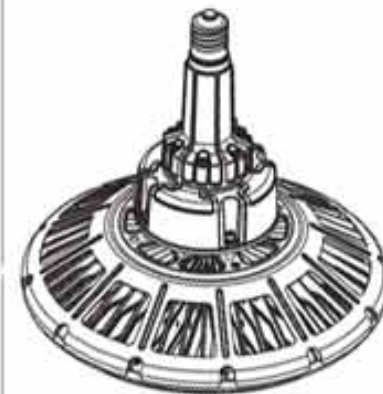


● E40 lamp holder
Special customization



hook with chain
mounting is standard



Heavy duty steel yoke
mounting is optional

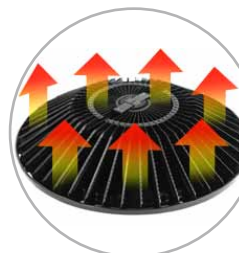

Massive Radiation Fins

Using 1060 aluminum, the aluminum content of 99.6%; good thermal conductivity, corrosion resistance; adopting the design of combining hollow-out holes and groove together, which can help to consolidate fins, maximize the cooling area and optimize the air channel, thus make it 3D heat dissipation;

Dust and moisture rating of IP65 per IEC60529 and impact protection of IK10 per EN62262 compliant, ensure long life and protection from the environment




Rod mounting is optional



MEANWELL driver in 90-305Vac, 50/60Hz. Power factor >95% and THD<15% IP65 aterproofed . PWM or 1-10V dimming is available

Optics lens in 60, 120 options with over 93% efficiency reduces light loss significantly

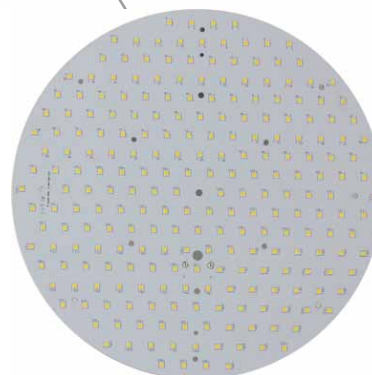

LM80 approved NICHIA LED is applied for maximum efficiency and long life(calculated L70>50,000h @ Ta=40℃) warm white 4000k and pure white 5700k with CRI 70+ standard, CRI>80 is optional. LPW up to 140 is available.



Transparent PC 120°



Frosted PC Cover 120°



Optical Lens PC 60°

Intelligent control solutions for your options

Zig Bee / Dali control



Zig Bee



Dali



Motion sensor



UFO High Bay with Zigbee controller inside



Computer/ phone/ pad/ Remote controller



LUX LIGHTING

**PHILIPS
LUMILEDS**

Watt	Model	Luminous Efficiency	Lumen	Dimension Size	Net Weight
100W	LX-UFO383	110-130lm/W	11000-13000lm	Ø 383mmxH217mm	≤4.7kg
120W	LX-UFO383	110-130lm/W	13200-15600lm	Ø 383mmxH217mm	≤5.1kg
150W	LX-UFO383	110-130lm/W	16500-19500lm	Ø 383mmxH217mm	≤5.1kg
200W	LX-UFO383	110-130lm/W	22000-26000lm	Ø 383mmxH217mm	≤5.7kg
240W	LX-UFO383	110-130lm/W	26400-31200lm	Ø 383mmxH217mm	≤5.7kg



LUX LIGHTING



OSRAM
Opto Semiconductors

Watt	Model	Luminous Efficiency	Lumen	Dimension Size	Net Weight
100W	LX-UFO383	115-135lm/W	11500-13500lm	Ø 383mmxH217mm	≤4.7kg
120W	LX-UFO383	115-135lm/W	13800-16200lm	Ø 383mmxH217mm	≤5.1kg
150W	LX-UFO383	115-135lm/W	17250-20250lm	Ø 383mmxH217mm	≤5.1kg
200W	LX-UFO383	115-135lm/W	23000-27000lm	Ø 383mmxH217mm	≤5.7kg
240W	LX-UFO383	115-135lm/W	27600-32400lm	Ø 383mmxH217mm	≤5.7kg



LUX LIGHTING



Watt	Model	Luminous Efficiency	Lumen	Dimension Size	Net Weight
100W	LX-UFO383	115-140lm/W	11500-14000lm	Ø 383mmxH217mm	≤4.7kg
120W	LX-UFO383	115-140lm/W	13800-16800lm	Ø 383mmxH217mm	≤5.1kg
150W	LX-UFO383	115-140lm/W	17250-21000lm	Ø 383mmxH217mm	≤5.1kg
200W	LX-UFO383	115-140lm/W	23000-28000lm	Ø 383mmxH217mm	≤5.7kg
240W	LX-UFO383	115-140lm/W	27600-33600lm	Ø 383mmxH217mm	≤5.7kg



LUX LIGHTING

WE MAKE THE WORLD BRIGHT.

Rose Series UFO



Building F, Chendexuan
Industrial Park, Lisonglang Village,
Guangming New District,
Shenzhen, China

www.luxledchina.com