

Careful heart

Full heart

Sincere heart

Relieved heart

Save-worry heart

Comfy heart

One hundred percent authentic manufacturer, more than 10 years experience in production of led light

With excelsior attitude, we aim to offer perfect product, as we believe vitality of a enterprise is depends on quality of product

5 years warranty, release innovative, reliable and high-performance LED light regularly

We care and take care of every inquiry, feedback and complaint of customers

Customer is partner, we pursuit profit, value and development with partner together

TGS Seriese

Product Features

- 1. Innovative design, Streamline design classic aesthetics
- 2. 0/1-10v Dimmable, DALI, ZigBee, PLC dimmable system
- 3. High efficacy up to 170lm/W
- 4. 5-7 years warranty
- 5. Easy installation
- 6. Competetive price based on the similar quality
- 7. Surge Protection Devices (SPDs) 10KV/20KV Optional



Model No.: LX-TGS400-400W

High Efficacy 150LM/W

LED QTY: 392 pcs (5050)

Packing Type: 2 unit(s)/ctn


Inner Packing Dimension: 63.3x18.3x68.8cm 1pcs

Packing Dimension: 68.5x40x71.5cm 2pcs

NW: ≈13.1kg

GW: ≈14.95kg 1 unit(s)/ctn GW: ≈31.4kg 2 unit(s)/ctn

PHILIPS LUXEON 5050: 400W




LED By: PHILIPS LUMILEDS

Powered By: MW MEAN WELL



Protection grade reaches Ip65



Anti-Level-17 hurricane



270 ° Adjustable

347-480V

AC

47-63HZ

100-305V

AC

47-63HZ

>0.95

PF

<15%

THD

10KV

20KV

SPD

2700-

7000K

CCT

70-90

CRI

LM80

IES LED

house

outdoor

IK08

shockproof

CLASS I

OFF

ON

dimmmable

CE

FC

RoHS

no

warranty


50000h

warranty

Working Temperature: -40-50°C Working Humidity: 10%~95%RH Best Working Temperature: -20 C ~+30°C Storage Temperature: -40 C ~+80 C

SURFACE TREATMENT

Powder baking process, strengthen the lamp body surface strength and corrosion resistance.

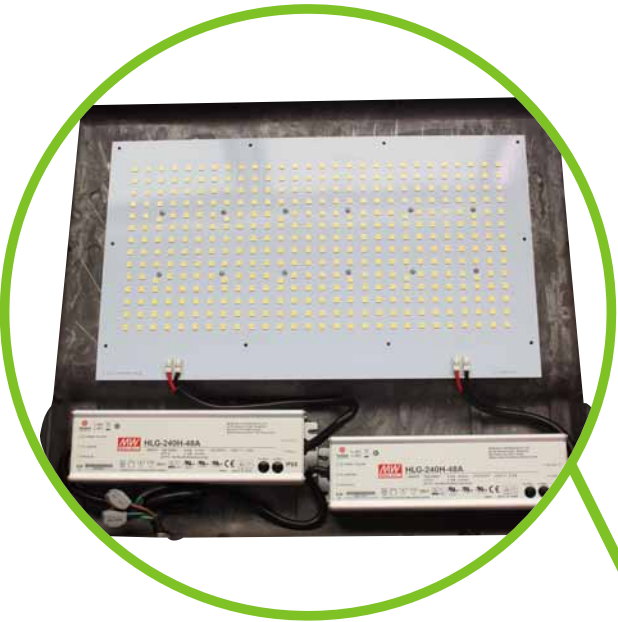

INTEGRATED DESIGN


Simple & graceful appearance, with integrated design. The lamp and driver box are integrated.



ROTATABLE DIAL


Clear dial, 270° adjustable, Adjust as you want.

DESIGN INNOVATION, EFFECTIVE PROTECTION

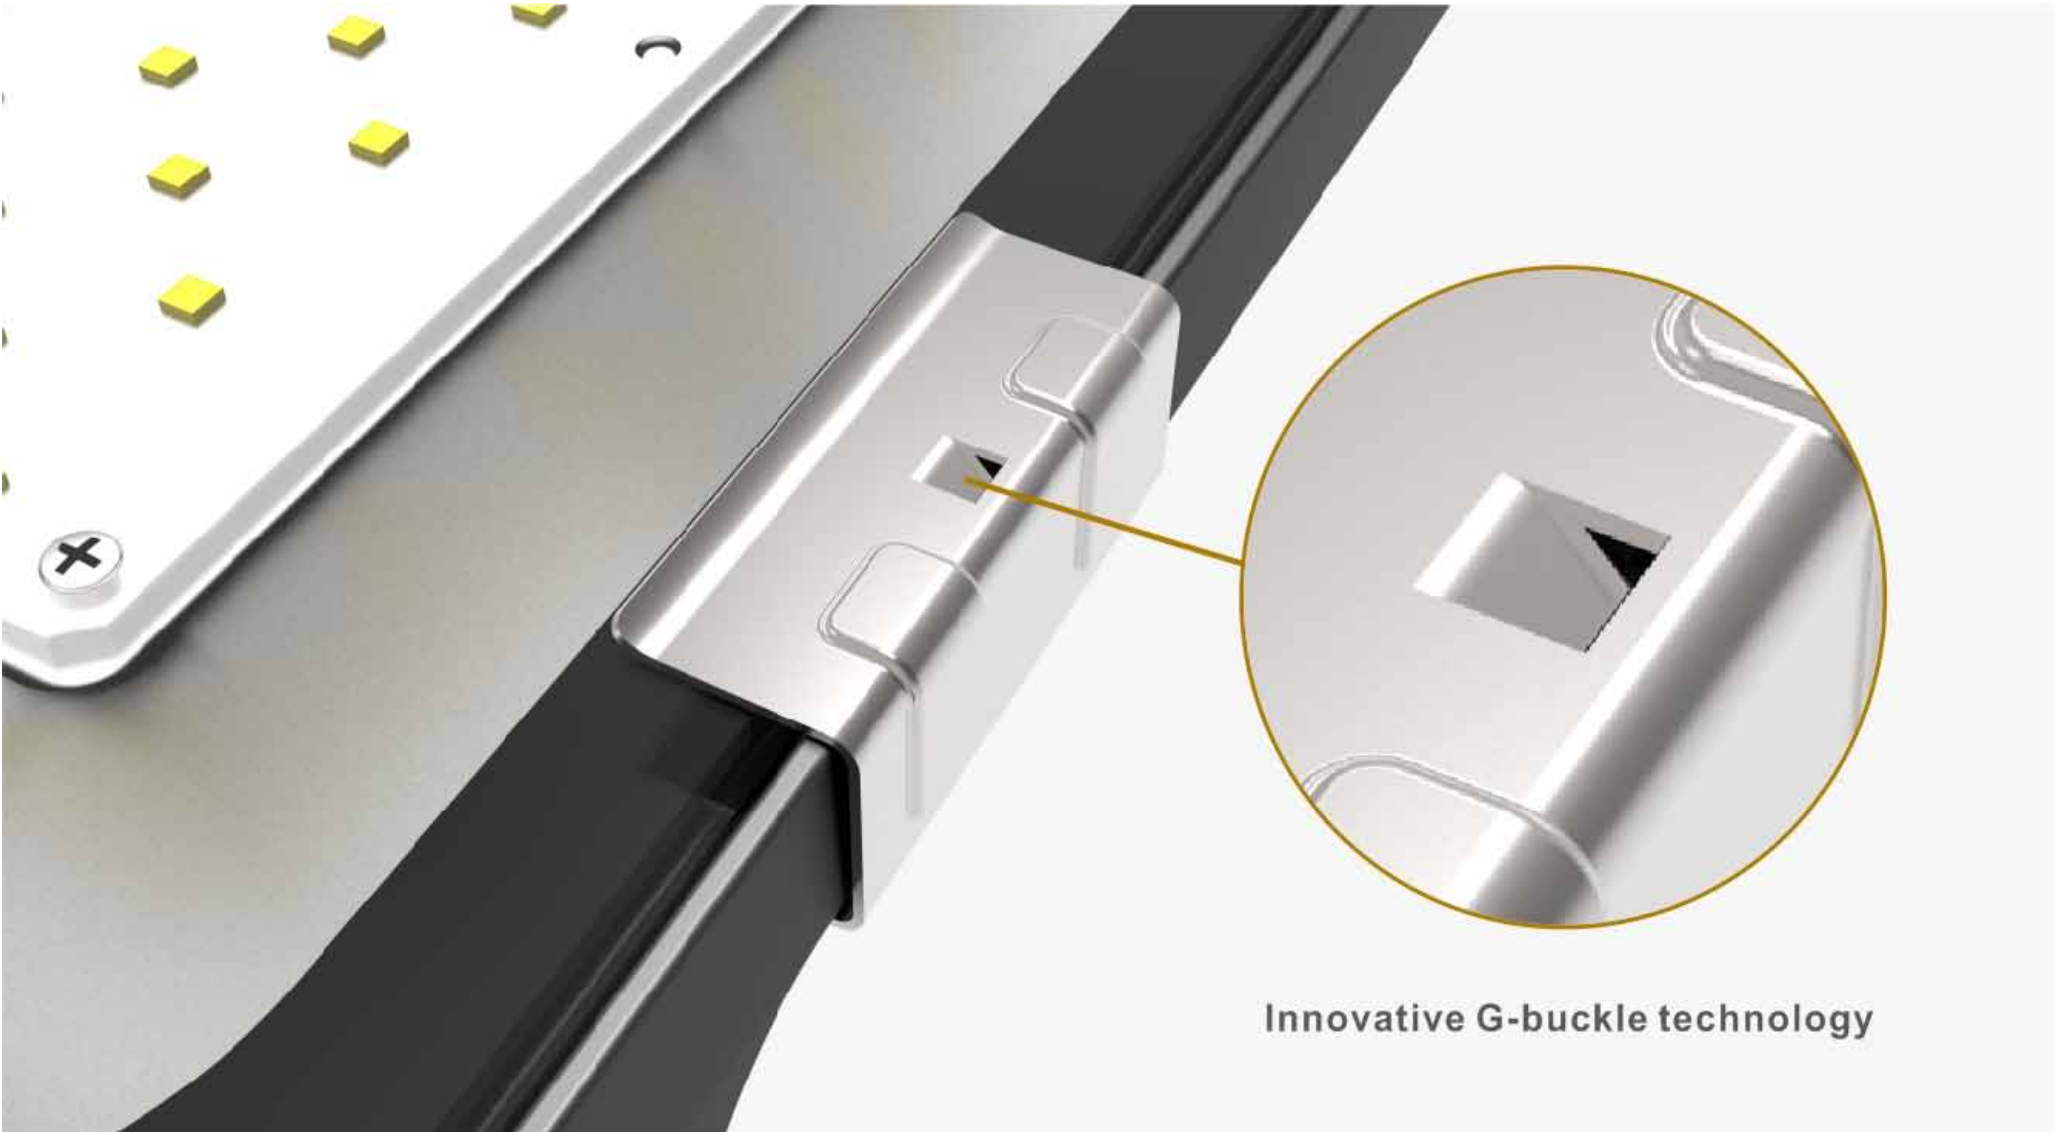


Innovative G-buckle technology


Innovative G-buckle technology, prevent glass off, free of screw fixing, elegant appearance, easy for assembling.

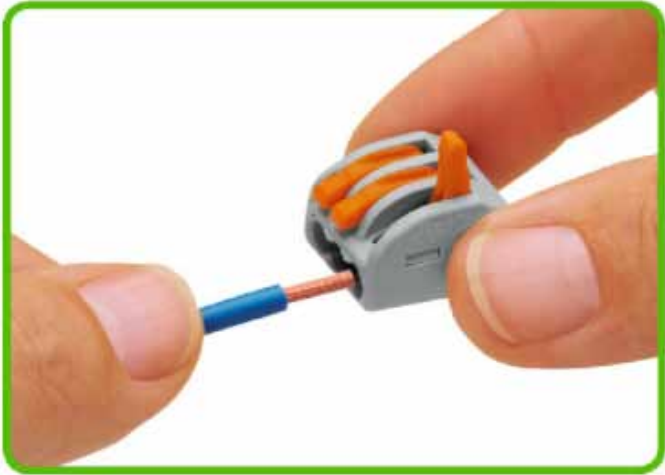


Use German **WAGO®** connectors for input wiring, safe, convenient & fast.

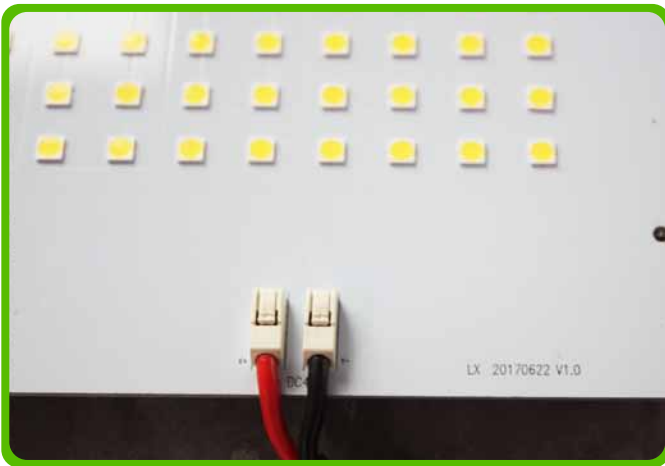

Use German **WAGO®** SMD PCB terminal block for output wiring, safe, convenient & fast.

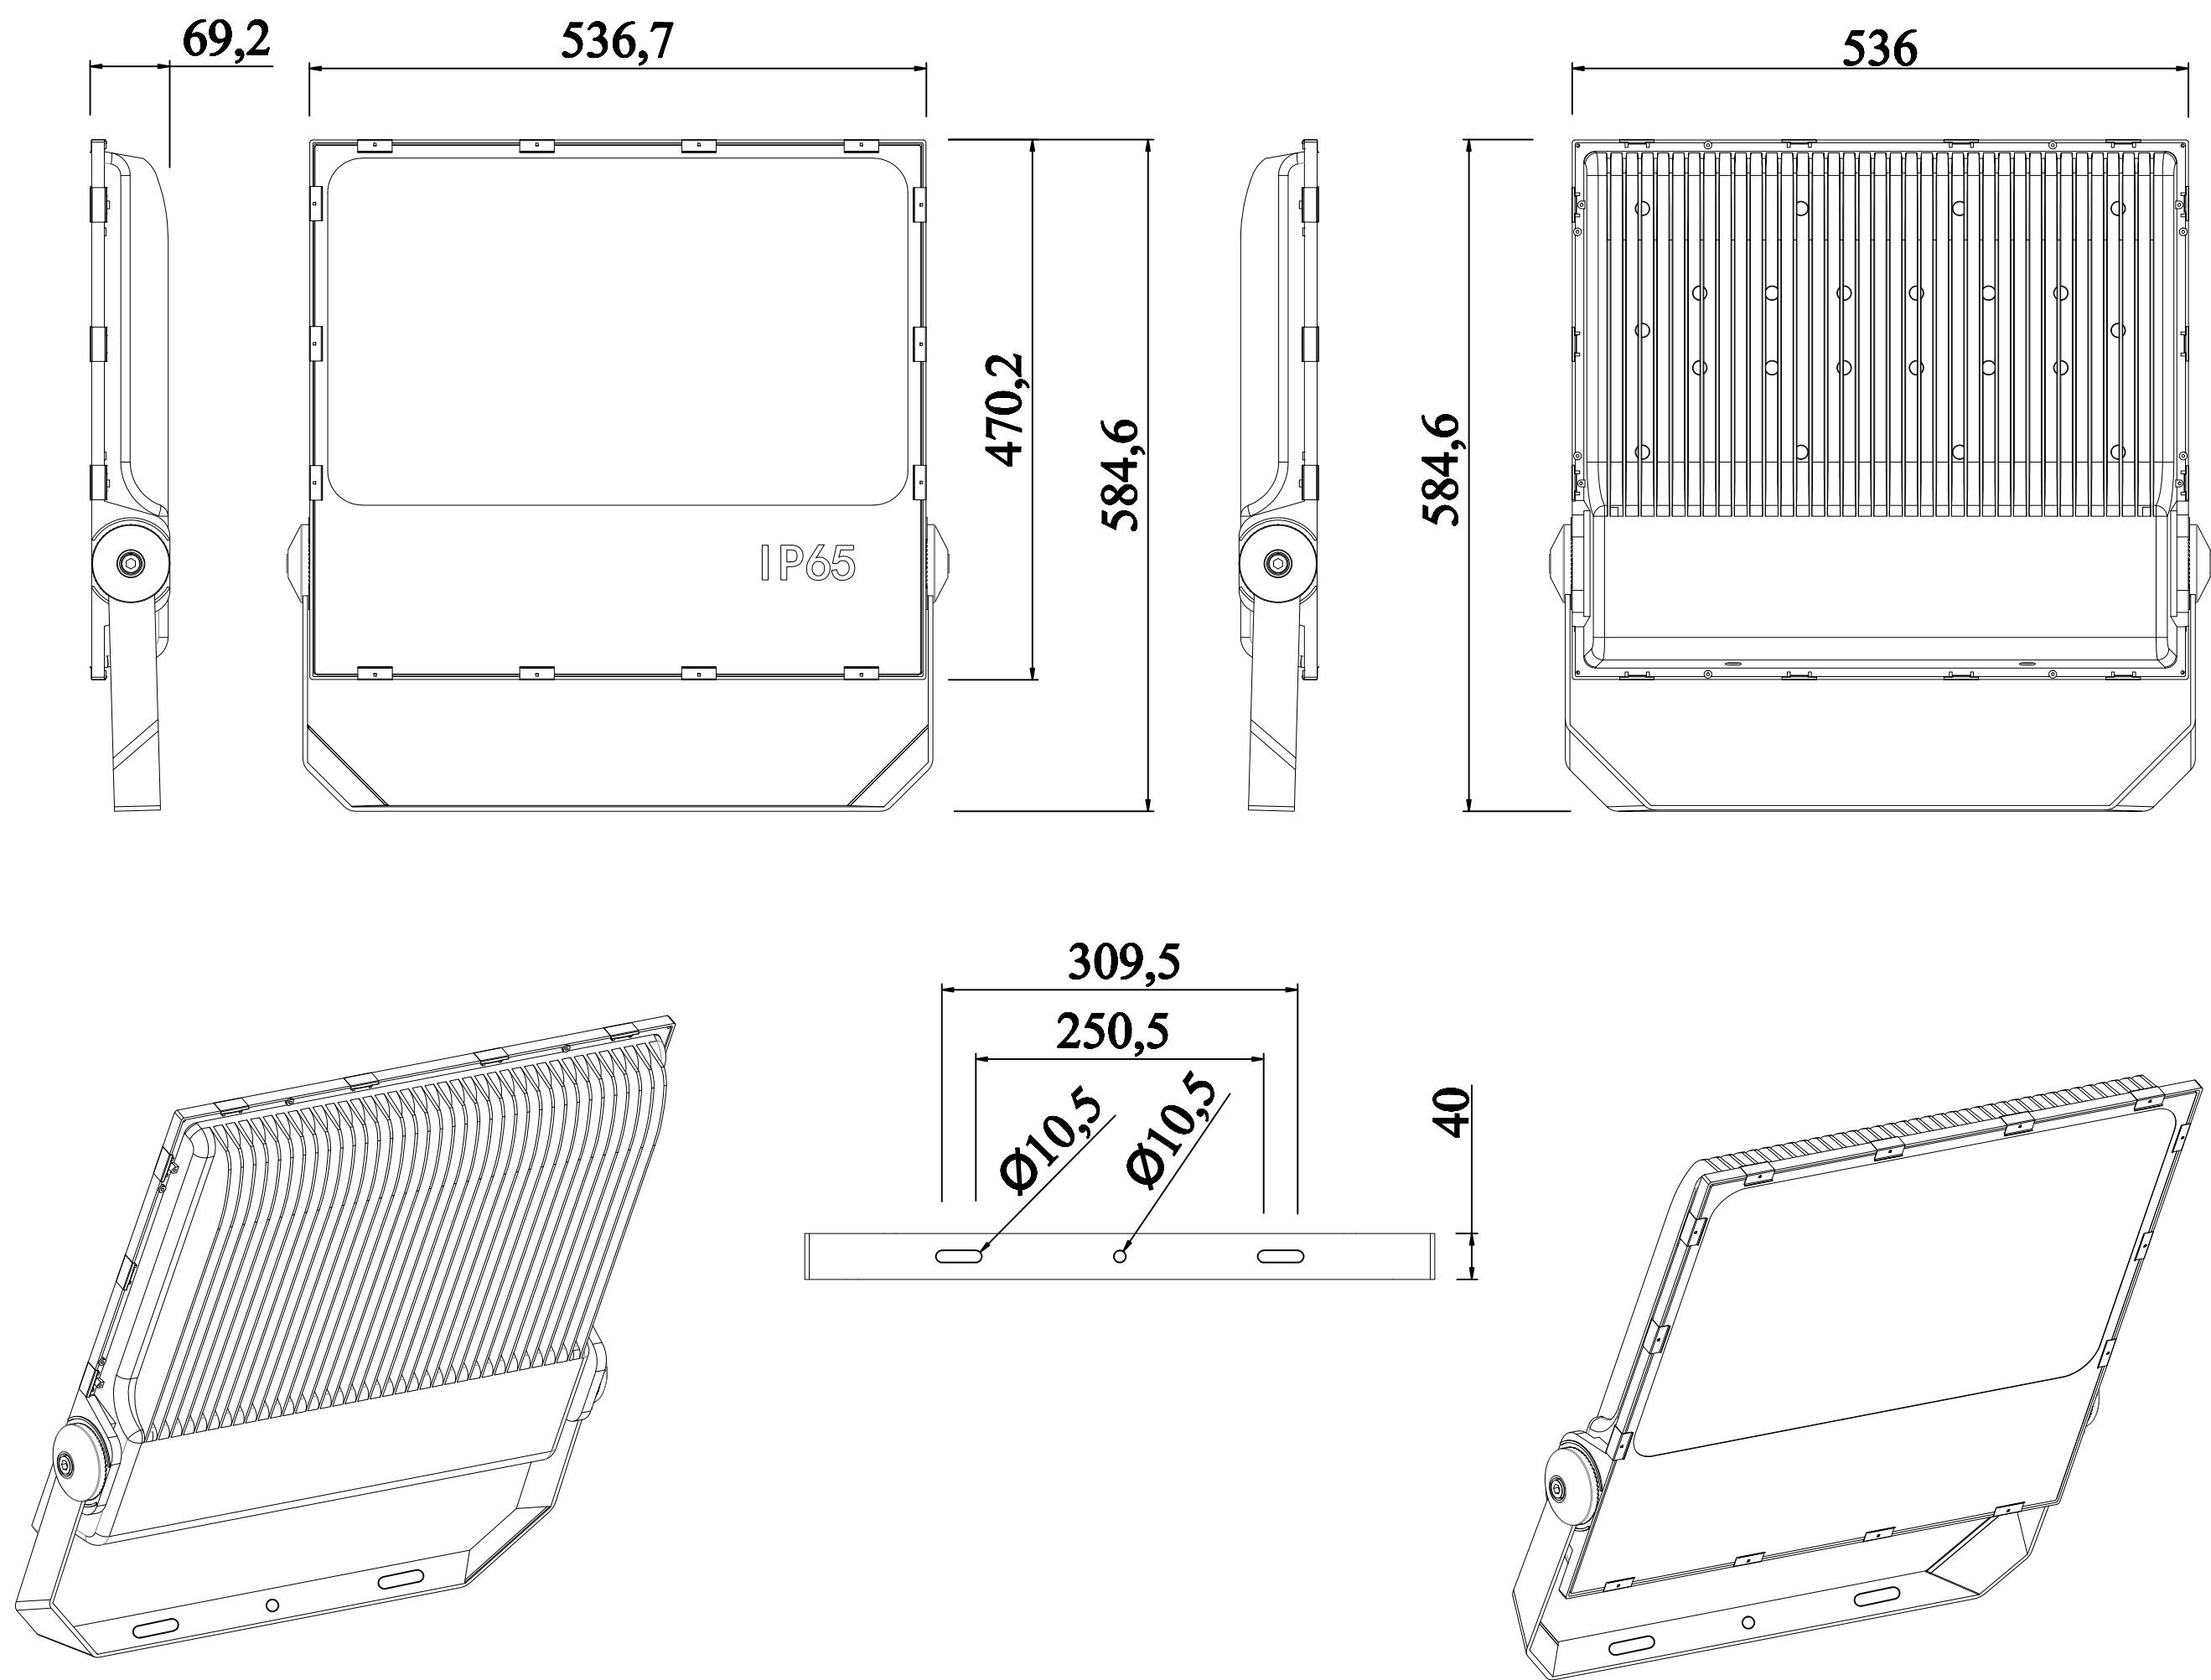

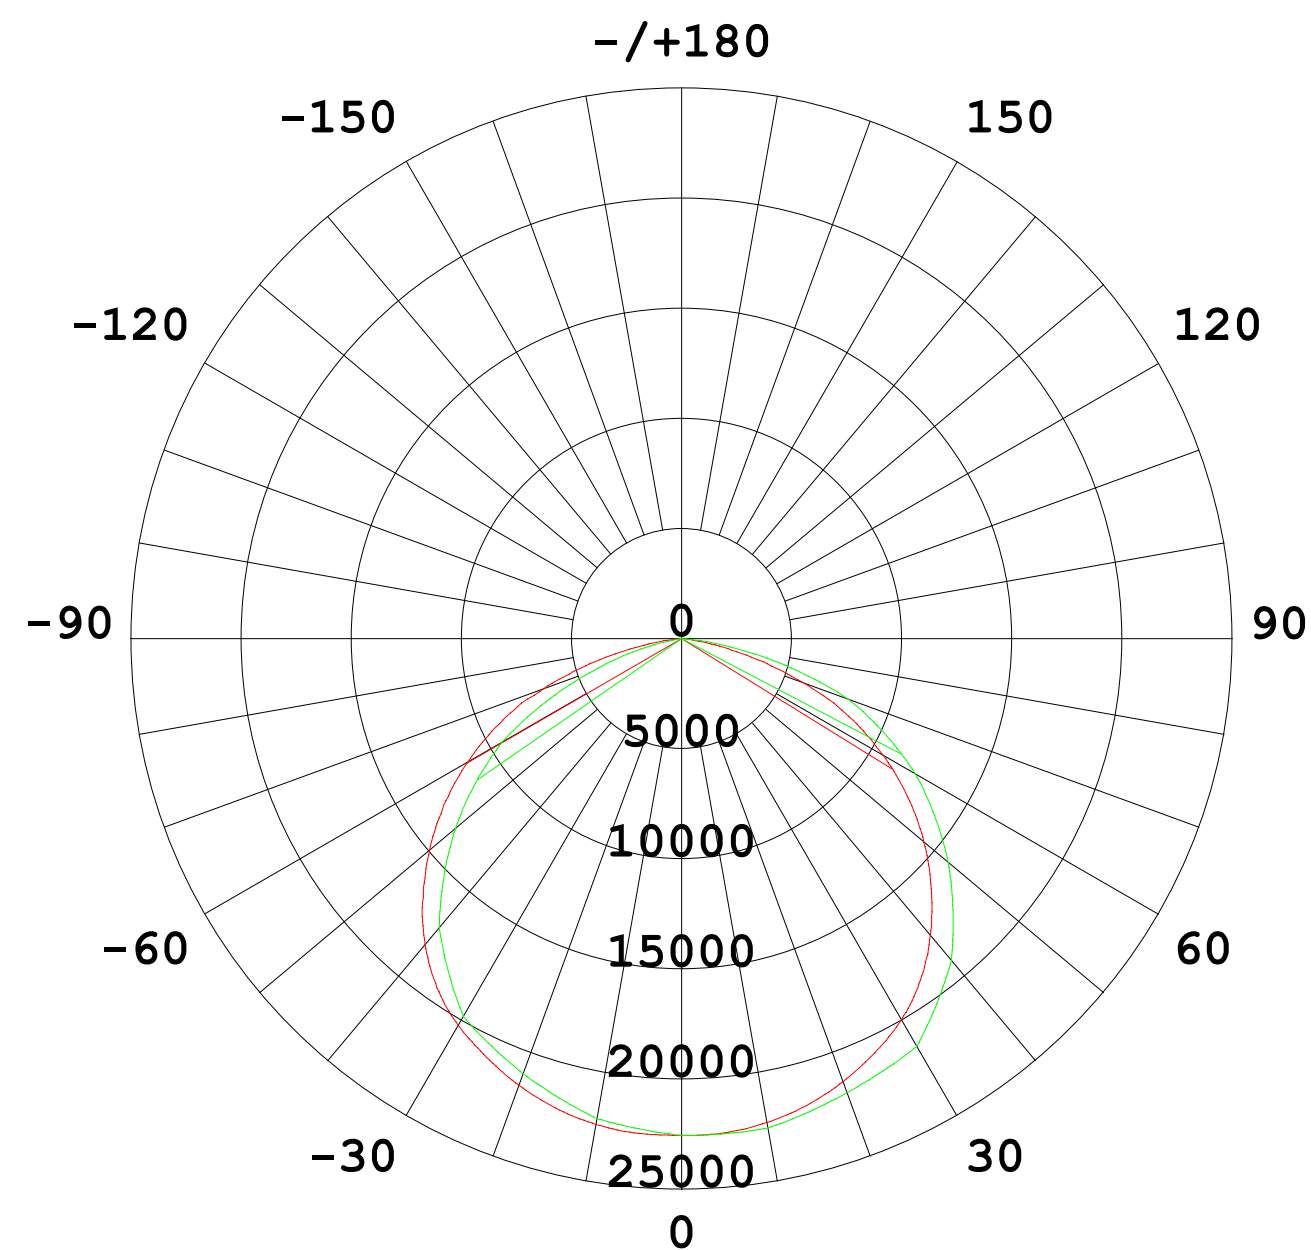

Height	Eavg, Emax	Diameter
10m	61.12, 225.61x	3307.55cm
15m	27.17, 100.21x	4961.33cm
20m	15.28, 56.39lx	6615.11cm
30m	6.791, 25.06lx	9922.66cm
40m	3.820, 14.10lx	13230.22cm

LX-TGS400-400W

LED CHIP MODEL

EFFICENCY POWER

LIGHT SOURCE

QUANTITY



PHILIPS
LUMILEDS

160-170 Lm/ W
400w



X392